
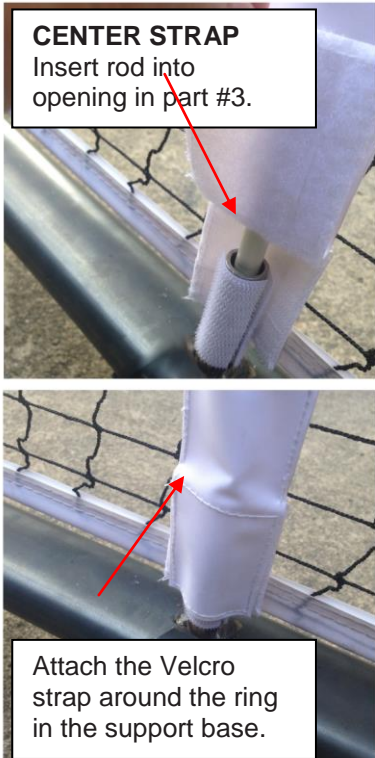


PickleNet Deluxe™ Assembly Instructions

1. Assemble the base frame first, working from one side to the other and fitting sections together as shown, making sure the parts are inserted fully into one another.
 - a. Connect the sections marked #2 with each end base #1.
 - b. Insert the center wheel #3 between the sections marked #2.
 - c. Insert each vertical end post #4 into both end bases #1.
2. Slide the net sleeves over the vertical posts. If needed, angle one of them inwards to gain leverage.
3. Use the Velcro straps to further extend the headband just enough to eliminate sagging.
4. Fasten the center strap as shown in the photo below.
5. For perfect regulation 36-inch net height at the posts, position the net sleeves and adjusting straps ½ inch below the bottom of the black cap on each side.
6. The easy way to repeatedly assemble and disassemble the PickleNet is to leave the net over the end posts and simply roll up the net.

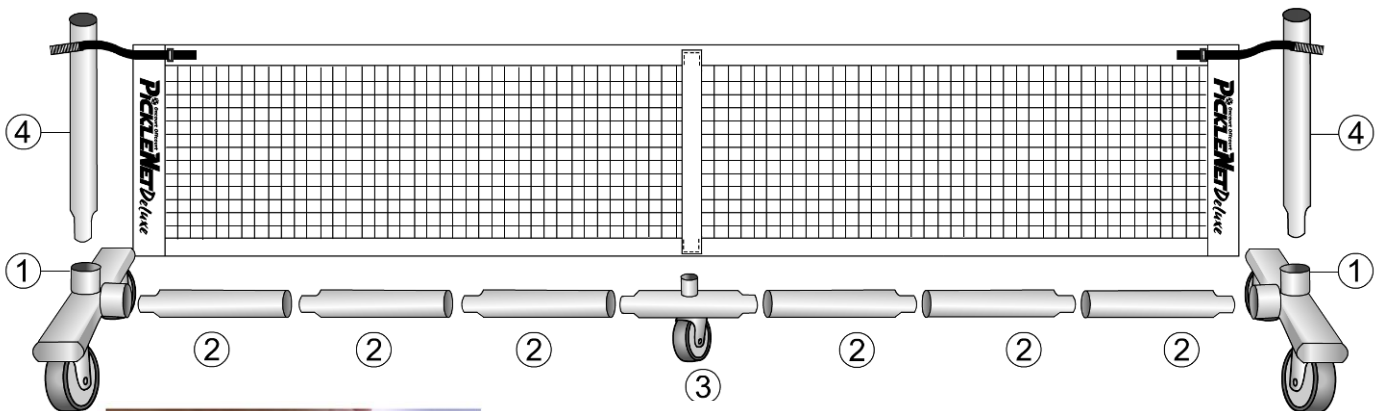

- PARTS:**
- 2 Ea -- End bases labeled #1
 - 6 Ea -- Support beams #2
 - 1 Ea -- Center support beam #3
 - 2 Ea -- End post #4
 - 1 Ea -- Net
 - 1 Ea -- Fiberglass net support rod
 - 1 Ea -- Carry Bag with wheels